




OFF-THE-ROAD TIRES

VCHP

V-STEEL CONTAINER HANDLER PREMIUM



Straddle carrier

Size	450/95R25
Load Index/ Speed Symbol	204A5
Tread Depth	50mm



Bridgestone Corporation
For your nearest Bridgestone Authorized Dealer,
visit our web site
www.bridgestone.com/products/speciality_tires/off_the_road

BRIDGESTONE
Solutions for your journey

OFF-THE-ROAD TIRES VCHP



Higher Load Index

Load index
200 → 204
* vs VCHR/VCHD




+2 tons



+16 tons for 4 axle machine
+12 tons for 3 axle machine

Performance

Overall enhanced performance with
Bridgestone's technology

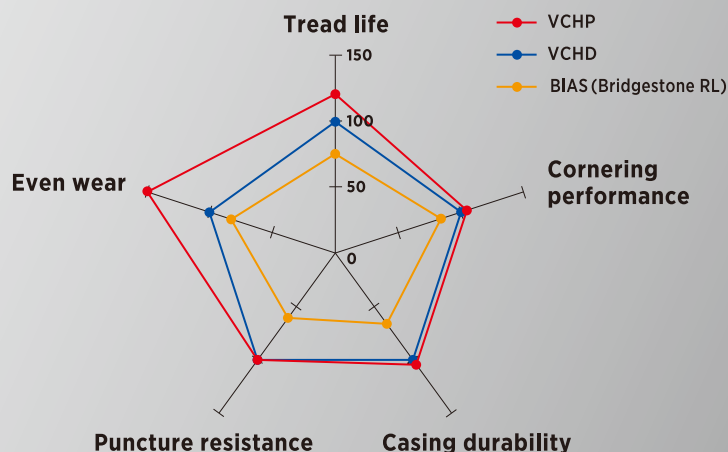

Superior Driving Comfort

Even wear & superior cornering

Longer Tread Life

Performance may vary depending
on site and conditions of use

Tire size	LI/SS	Type	Recommended Rim & Flange Height	Approximate Inflated Dimensions								OTD
				OD		OW		SLR		SLW		
				mm	inch	mm	inch	mm	inch	mm	inch	mm
450/95R25	204A5	T/L	11.25/2.0 inch	1504	59.2	435	17.1	674	26.5	500	19.7	50.0
			13.00/2.0 inch									

T/L: Tubeless

LI: Load Index SS: Speed Symbol OD: Overall Diameter OW: Overall Width
SLR: Static Loaded Radius SLW: Static Loaded Width OTD: Original Tread Depth

Specifications are subject to change without notice

USE OF THIS PRODUCT OTHER THAN FOR INTENDED PURPOSES IS STRICTLY PROHIBITED

Bridgestone Corporation
For your nearest Bridgestone Authorized Dealer,
visit our web site
www.bridgestone.com/products/speciality_tires/off_the_road

20ORA1E

BRIDGESTONE
Solutions for your journey